


**TYPE: ME.TRE-20 20VA
CORE SIZE: EI60/21**

Features

- Epoxy resin cast
- Two chambers bobbin
- Insulation primary-secondary: 4KV
- Increased humidity resistance

Manufacturing standard: EN 61558

- Safety insulation transformer
- Max.ambient temperature: ta 70°C
- Insulation class: ta 70°C/B 130°C
- Double insulated
- Degree of protection: IP00
- Not short-circuited

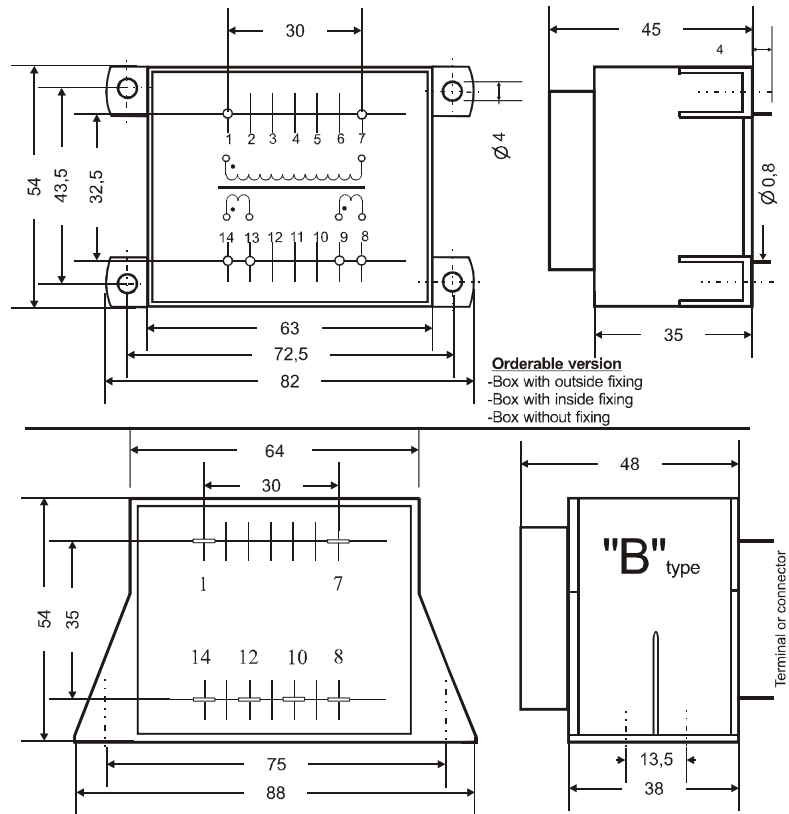

Application

- PCB mounting installation
- “B” version to fitting

Ordering codes

- “N” without fixing possibility
- “K” with fixing possibility
- “B” vertical mounting version

*Deviation of secondary voltages 5%
Prescribed primary circuit fuse 125mA*

Modell numer	Primary voltage	Pin configuration	Secondary voltage	Pin configuration	Secondary current
ME.TRE-20.60106/	230 V	1-7	6 V	9-13	3,33 A
ME.TRE-20.60175/	230 V	1-7	7,5 V	9-13	2,66 A
ME.TRE-20.60109/	230 V	1-7	9 V	9-13	2,22 A
ME.TRE-20.60112/	230 V	1-7	12 V	9-13	1,66 A
ME.TRE-20.601135/	230 V	1-7	13,5 V	9-13	1,48 A
ME.TRE-20.60115/	230 V	1-7	15 V	9-13	1,33 A
ME.TRE-20.60118/	230 V	1-7	18 V	9-13	1,11 A
ME.TRE-20.60124 /	230 V	1-7	24 V	9-13	0,83 A

ME.TRE-20.60106-2/	230 V	1-7	2x6 V	8-9 13-14	2x1,66 A
ME.TRE-20.60175-2/	230 V	1-7	2x7,5 V	8-9 13-14	2x1,33 A
ME.TRE-20.60109-2/	230 V	1-7	2x9 V	8-9 13-14	2x1,11 A
ME.TRE-20.60112-2/	230 V	1-7	2x12 V	8-9 13-14	2x0,83 A
ME.TRE-20.601135-2/	230 V	1-7	2x13,5 V	8-9 13-14	2x0,74 A
ME.TRE-20.60115-2/	230 V	1-7	2x15 V	8-9 13-14	2x0,66 A
ME.TRE-20.60118-2/	230 V	1-7	2x18 V	8-9 13-14	2x0,55 A
ME.TRE-20.60124-2/ *	230 V	1-7	2x24 V	8-9 13-14	2x0,41 A

*Certified as insulation transformer