


TYPE: ME.TRE-30 30VA
CORE SIZE: EI66/23

Features

- Epoxy resin cast
- Two chambers bobbin
- Insulation primary-secondary: 4KV
- Increased humidity resistance

Manufacturing standard: EN 61558

- Safety insulation transformer
- Max.ambient temperature: ta 70°C
- Insulation class: ta 70°C/B 130°C
- Double insulated
- Degree of protection: IP00
- Not short-circuited

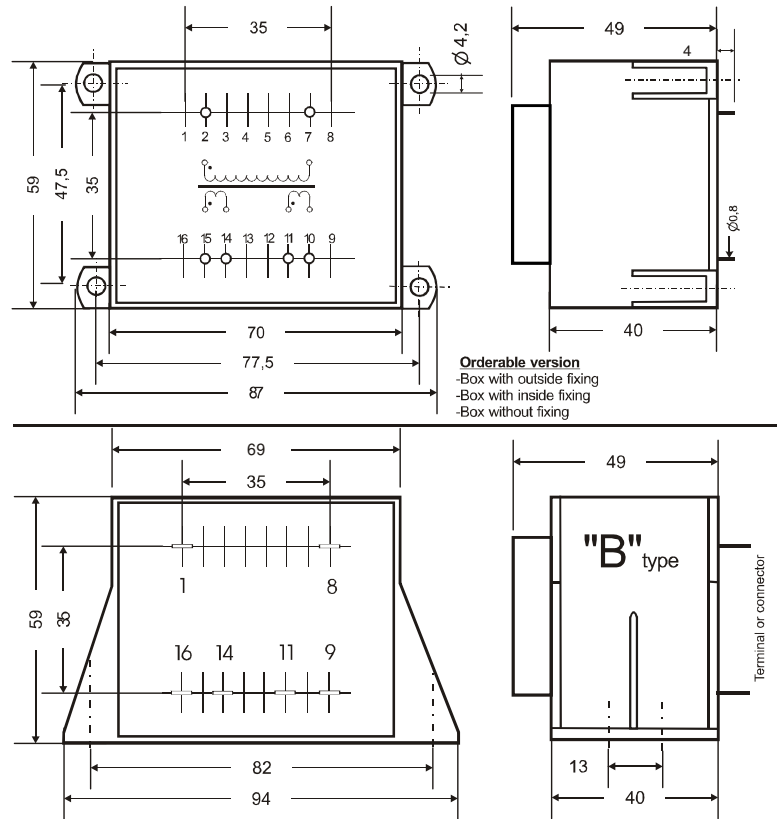

Application

- PCB mounting installation
- “B” version to fitting

Ordering codes

- “N” without fixing possibility
- “K” with fixing possibility
- “B” vertical mounting version

Deviation of secondary voltages 5%
Prescribed primary circuit fuse 200mA

Modell numer	Primary voltage	Pin configuration	Secondary voltage	Pin configuration	Secondary current
ME.TRE-30.66206/	230 V	2-7	6 V	11-14	5,00 A
ME.TRE-30.66275/	230 V	2-7	7,5 V	11-14	4,00 A
ME.TRE-30.66209/	230 V	2-7	9 V	11-14	3,33 A
ME.TRE-30.66212/	230 V	2-7	12 V	11-14	2,50 A
ME.TRE-30.662135/	230 V	2-7	13,5 V	11-14	2,22 A
ME.TRE-30.66215/	230 V	2-7	15 V	11-14	2,00 A
ME.TRE-30.66218/	230 V	2-7	18 V	11-14	1,66 A
ME.TRE-30.66224 /	230 V	2-7	24 V	11-14	1,25 A

ME.TRE-30.66206-2/	230 V	2-7	2×6 V	10-11-14-15	2×2,50 A
ME.TRE-30.66275-2/	230 V	2-7	2×7,5 V	10-11-14-15	2×2,00 A
ME.TRE-30.66209-2/	230 V	2-7	2×9 V	10-11-14-15	2×1,66 A
ME.TRE-30.66212-2/	230 V	2-7	2×12 V	10-11-14-15	2×1,25 A
ME.TRE-30.662135-2/	230 V	2-7	2×13,5 V	10-11-14-15	2×1,11 A
ME.TRE-30.66215-2/	230 V	2-7	2×15 V	10-11-14-15	2×1,00 A
ME.TRE-30.66218-2/	230 V	2-7	2×18 V	10-11-14-15	2×0,83 A
ME.TRE-30.66224-2/ *	230 V	2-7	2×24 V	10-11-14-15	2×0,62 A

*Certified as insulation transformer